



1	Perimeter Wall Angle Trim 24x24 (#170580)
2	ECR Main Runner T15 / T24
3	Suitable Screw
4	Suitable Top-Fixing

Notes

- Wall Angle Trim (Rigid Angle Hanger) to be cut to length on site (standard length 3050mm).
- Lower end to be screwed into bulb of grid component using suitable screw/fixing, upper end to be bent through 90° and attached to soffit using suitable top-fixing.

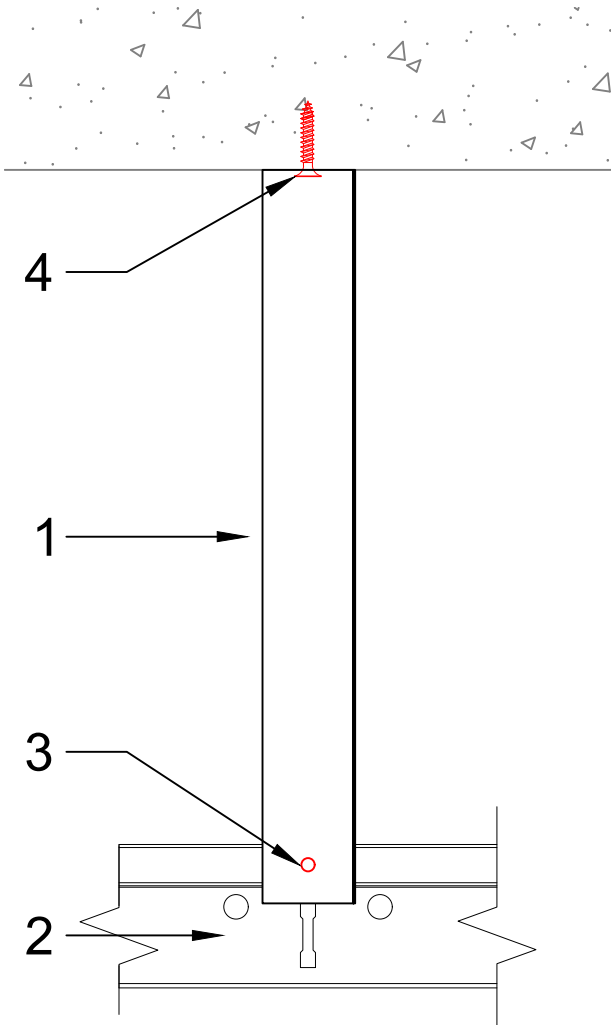

Side View

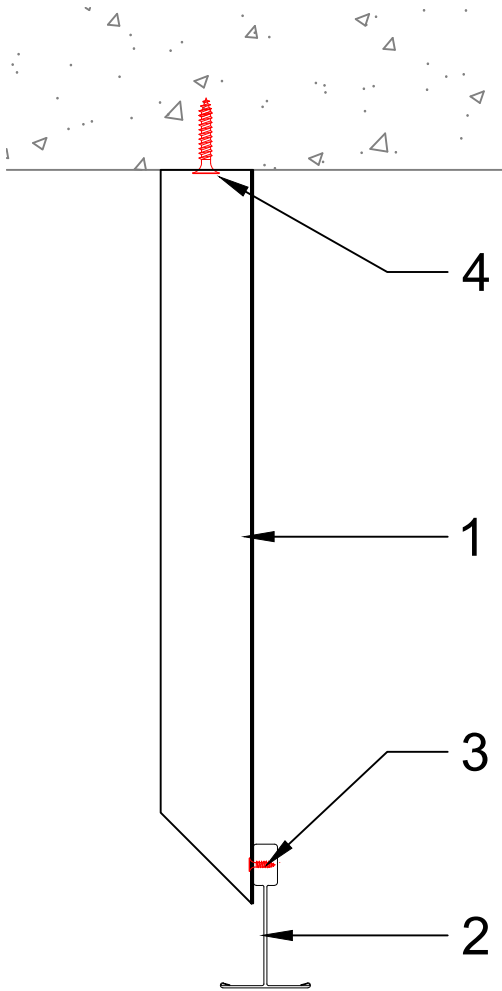

Front View

All screws and fixings shown are for illustrative purposes only.
Suitable fixings should be selected based on structure and materials used.

Information:

T15 & T24 Suspended Ceiling Systems - Suspension Options
Rigid Angle Hanger - Enhanced Corrosion Resistance

We kindly draw your attention to the fact that the above drawings should be considered as guidelines and therefore are without responsibility on the part of Rockfon.

Date:

16 January 2019

Drawn by:

C Murphy

Scale:

1:2 @ A3

Revision

0

Drawing Number:

UKI-01-INS-RA-02

Drawing Type:

Technical

Contact Information:

technical.uki@rockfon.com

Part of the ROCKWOOL Group



Rockwool Limited T/A Rockfon, Pencoeed, Bridgend CF35 6NY | rockfon.com