

# Rockfon® Artic+



# Rockfon® Artic+





- A good and economical tile for most applications.
- Offers an appealing visual finish for everyday spaces.
- Provides Class A sound absorption for good noise control in busy environments.
- Comes in a basic range of tile dimensions in semi-concealed and visible grid options.
- Simplifies maintenance in areas where cleanliness is important.
- Built with robust stone wool, A1 non-combustible and moisture resistant.

## Product Description

- Stone wool tile
- Visible side: smooth white painted fleece
- Rear Side: back fleece

## Application Areas

- Office
- Retail
- Education

Edges	Module size (mm)	Weight (kg/m <sup>2</sup> )	MS / MS Easy Access (mm)	Recommended installation System	Recycled Content	A1-A3 Production stage impact (kg CO <sub>2</sub> eq/m <sup>2</sup> )*	A1-C4 Full life cycle impact (kg CO <sub>2</sub> eq/m <sup>2</sup> )*
 A15	600 x 600 x 15	2.0	50/100	Rockfon® System T15 A	56%	1.62	2.08
 A24	600 x 600 x 15	2.0	50/100	Rockfon® System T24 A	56%	1.62	2.08
	1200 x 600 x 15		50/100	Rockfon® System XL T24 A			
 E15	600 x 600 x 15	2.0	58/100	Rockfon® System T15 E	56%	2.10	2.63
			100/100	Rockfon® System Ultraline E			
 E24	600 x 600 x 15	2.0	58/100	Rockfon® System T24 E	56%	2.10	2.63
			58/100	Rockfon® System XL T24 E			
	1200 x 600 x 15		58/100	Rockfon® System T24 E			

MS = Minimum Suspension


\* For full environmental impact disclosure, see our product EPDs available on [rockfon.link/uk-epd](https://rockfon.link/uk-epd). Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.



## Performance



**Sound absorption**  
 $\alpha_w$ : 0.95 (Class A)

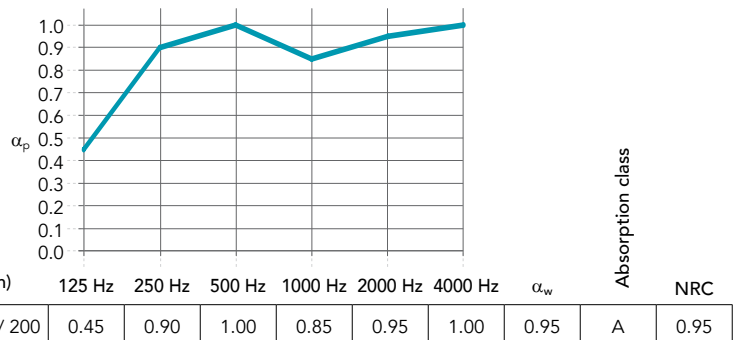

**Reaction to fire**  
 A1



**Fire Resistance**  
 The fire resistant properties of stone wool ensure Rockfon ceiling tiles provide fire protection in construction. The fire protection properties of Rockfon ceilings have been tested and classified in accordance with European norm EN 13501-2 and/or national norms depending on requirements in building codes. Some sizes and edge details of Rockfon Artic can be used with various Chicago Metallic grids and Rockfon systems to create a 30 minutes fire protecting ceiling in accordance with BS 476 Part 21 and Part 23.



**Light reflection**  
 83 %



**Humidity and sag resistance**  
 Up to 100% RH.  
 No visible deflection in high humidity  
 C/0N



**Cleaning**  
 - Vacuum  
 - Damp cloth (occasional clean)



**Hygiene**  
 Stone wool provides no sustenance to microorganisms



**Recyclability**  
 Fully recyclable stone wool



**Indoor environment**  
 Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



**Material Health**  
 All materials used in Rockfon products are screened against the list of substances restricted under REACH or recognized as Substances of Very High Concern (SVHC) on an ongoing basis. Rockfon stone wool fibres comply with the safe fibre EU regulation and hold an EUCEB certification.

06.2026 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.

# Sounds Beautiful

