

Rockfon® CleanSpace Block



Rockfon® CleanSpace Block


- Rockfon CleanSpace Block is specifically designed for use in high-risk, air pressure controlled environments such as cleanrooms and laboratories where there are demanding sanitation requirements
- Very low particle emission: ISO Class 2
- Resistance to stringent detergents and disinfectants, resulting in 'Excellent' chemical resistance classification
- Does not contribute to the growth of microorganisms

Product Description

- Mineral wool tile encased within an air- and watertight inert film

Application Areas

- Healthcare
- Industry

Edges	Module size (mm)	Weight (kg/m ²)	MS / MS Easy Access (mm)	Recommended installation System
 A24	600 x 600 x 25	2.0	50 / 100	Rockfon® System CleanSpace T24 A, E (ECR)
	1200 x 600 x 25		50 / 100	Rockfon® System CleanSpace T24 A, E (ECR)


MS = Minimum Suspension



Performance



Sound absorption
 α_w : 0.90 (Class A)

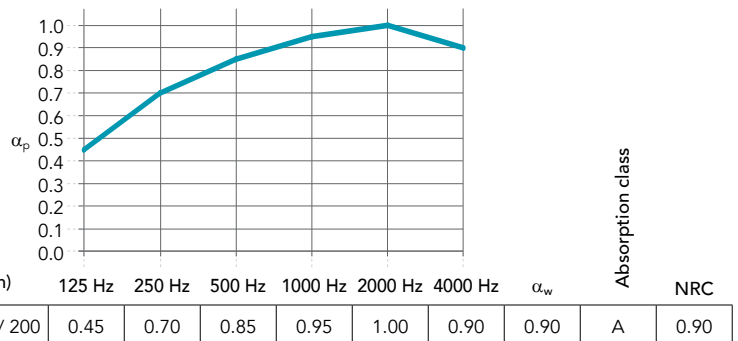

Reaction to fire
 B-s1,d0



Light reflection
 74%



Humidity and sag resistance
 Up to 100% RH.
 No visible deflection in high humidity



Cleaning

- Vacuum
- Damp cloth
- Steam cleaning (twice a year)
- Low pressure foam cleaning (twelve times a year)
- High pressure cleaning (monthly and only applicable for A-edge installation). Max. 80 bar, min. 1 meter distance, water spread at 30° angle, max. water flow 360 L/h. The tiles should be clipped into the grid.
- Chemical resistance: Tested according to ISO 2812-1 ("Determination of resistance to liquids - Part 1: Immersion in liquids other than water") and classification in accordance with VDI 2083 Part 17. Results are classified as 'Excellent' with the following detergents and disinfectants (daily disinfection):
 - Formalin (37%)
 - Ammonia (25%)
 - Hydrogen peroxide (30%)
 - Sulphuric acid (5%)
 - Phosphoric acid (30%)
 - Peracetic acid (15%)
 - Hydrochloric acid (5%)
 - Isopropanol (100%)
 - Sodium hydroxide (5%)
 - Sodium hypochlorite (15%)
- Use only soft equipment directly on the tile surface: cloth or sponge. Avoid scraping or stiff brush rubbing.



Disinfection

- Resistant to using Hydrogen Peroxide Vapor disinfection without impact on aeration time
- Can withstand and will not be affected by UVC and Ozone disinfection



Hygiene
 Microbiological class M1 fulfilling the requirements of Zone 4 (very high risk) defined by NF S 90-351:2013. Tested with:

- Methicillin resistant *staphylococcus aureus* (MRSA)
- *Candida albicans*
- *Aspergillus brasiliensis*
- *E. Coli*
- *Bacillus cereus*

M1 (zone 4) for the 5 tested pathogens.

The particle elimination kinetics class is conform to CP(0,5)5 according to the norm NF S 90-351:2013.



Surface durability
 The high performance inert film of Rockfon CleanSpace Block provides enhanced durability and water-repellence. The film contains DMAc (CAS 127-19-5) in a concentration $\geq 0.1\%$ and $< 1\%$ by weight.



Clean room
 ISO Class 2



Air Pressure
 Suitable in areas where differential pressure is required. When used in combination with:

- HDC 2 for the 25 mm tile;

the air leakage rate of less than 0.5m³/h/ m²/Pa under a pressure range of 5 to 40 Pa is achieved. The amount of hold down clips (HDC) depends on the tile dimensions and the room size/shape. For more information please contact customer service.

06.2026 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.

Sounds Beautiful

