

DATASHEET

Rockfon® Timber Ceiling



Sounds Beautiful

Rockfon® Timber Ceiling



- Rockfon Timber is a range of high-quality wood panel systems designed to improve the sound quality within a room, reducing echo and noise levels to create a more comfortable and pleasant indoor environment. It combines the aesthetic beauty of wood with the excellent acoustic properties of stone wool.
- Rockfon Timber is engineered with a high-grade reaction to fire performance on a system level, ensuring safety without compromising aesthetics, providing peace of mind in any space.
- Designed for easy integration into Rockfon grid systems, our acoustic panels streamline the process, saving time and effort during installation.
- Rockfon Timber Ceiling Panels are CE marked in accordance with EN 13964:2014.

Product Description

- Wood panel system with integrated stone wool absorber for optimised acoustics and ease of installation.
- Available in 4 different design patterns and 2 module sizes.
- The wood panels are made of Poplar Plywood with veneer surfaces in oak, walnut, ash or pine.
- The visible fleece between the wood panel and stone wool absorbent is available in black or grey.

Application Areas

- Office
- Healthcare
- Education
- Leisure
- Retail

Edges	Design*	Module size (mm)	Weight (kg/m²)
D24 TIMB 	12-34-06	1200 x 600 x 33	9.0
		2400 x 600 x 33	8.6
	12-Shuffle-16	1200 x 600 x 33	8.1
		2400 x 600 x 33	7.7
	20-20-30	1200 x 600 x 41	7.3
		2400 x 600 x 41	7.3
E15/15 TIMB 	25-24-36	1200 x 600 x 46	8.6
		2400 x 600 x 46	8.2
	12-Shuffle-16	1200 x 600 x 33	7.3
		2400 x 600 x 33	7.3
E24/15 TIMB 	20-20-30	1200 x 600 x 41	6.9
		2400 x 600 x 41	6.9
	25-24-36	1200 x 600 x 46	7.8

* Explanation of designs:


12-34-06: 12=Thickness, 34=Width, 6=Gap

12-Shuffle-16: 12=Thickness, 29 and 50 (shuffled)=Width, 16=Gap


20-20-30: 20=Thickness, 20=Width, 30=Gap

25-24-36: 25=Thickness, 24=Width, 36=Gap

Design

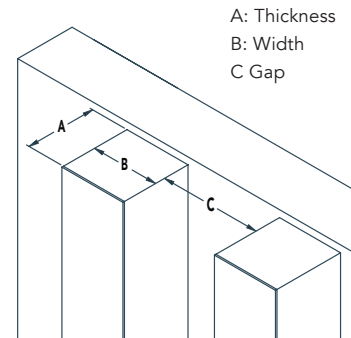

Veneer Types

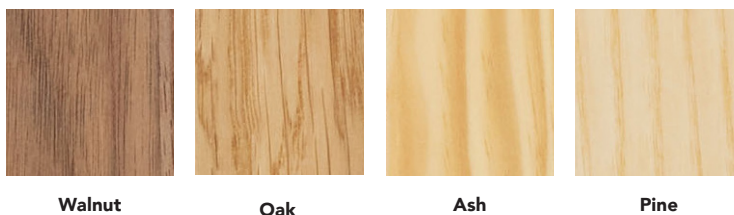


Characteristics of Wood

Wood is a natural material and some degree of variation in Colour tones, texture and visual appearance must be expected from products made from wood - even from the same production batch. We cannot guarantee that products made from different production batches are intermixable even though the product is exactly the same.

Wood products naturally develop a patina and change in appearance over time, particularly when exposed to natural light and environments with high humidity. As a result, it is generally not possible to provide new products with the exact same visual expression as products that have already been installed, even after relatively short periods of time.

In critical light conditions where high levels of daylight or electrical light is projected onto the wood products from steep angles, significant variations in the visual appearance must be expected.

Fleece Colours

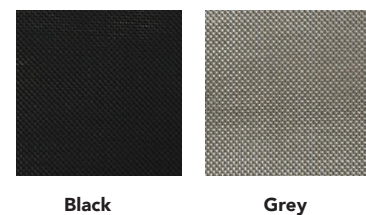




Performance



Sound absorption

α_w : up to 1.00 (Class A)

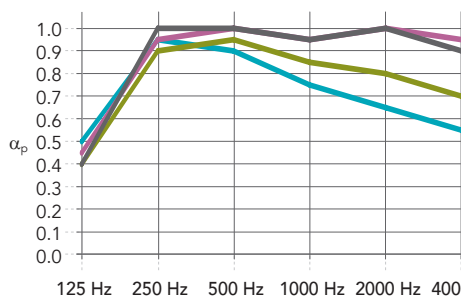

Product /
Thickness (incl. tile & slat - mm) /
Suspension (incl. tile & slat - mm)

	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	α_w	Absorption class	NRC
Rockfon Timber 12-34-06 + absorbent 20 mm / 33 / 213	0.50	0.95	0.90	0.75	0.65	0.55	0.70	C	0.85
Rockfon Timber 12-shuffle-16 + absorbent 20 mm / 33 / 213	0.40	0.90	0.95	0.85	0.80	0.70	0.85	B	0.85
Rockfon Timber 20-20-30 + absorbent 20 mm / 41 / 221	0.45	0.95	1.00	0.95	1.00	0.95	1.00	A	1.00
Rockfon Timber 25-24-36 + absorbent 20 mm / 46 / 226	0.40	1.00	1.00	0.95	1.00	0.90	1.00	A	1.00



Reaction to fire

B-s1,d0
B-s2,d0 (Oak/Pine: 12-Shuffle-16 / 20-20-30 / 25-24-36)



Humidity and sag resistance

Rockfon Timber is suitable for dry indoor use only. Up to 65% RH.
A/0N



Cleaning

- Vacuum



Hygiene

Stone wool provides no sustenance to microorganisms



Recyclability

Fully recyclable stone wool



Indoor environment

Rockfon ceiling products are classified as Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



Material Health

All materials used in Rockfon products are screened against the list of substances restricted under REACH or recognized as Substances of Very High Concern (SVHC) on an ongoing basis. Rockfon stone wool fibres comply with the safe fibre EU regulation and hold an EUCB certification.

Sounds Beautiful

