


## Round access hatch

Round access hatches are opened by rotating and releasing the opening. Round access hatches are available in 700 mm diameter. Reinforcement around the hatch is mandatory. They are made from aluminum, pre-painted white and are ready to be rendered. They can be finished with Mono Acoustic Render for a consistent appearance. Once finished, only a small tooled joint of approximately 1 mm is left for the operating clearance.

Joint filling: filler -> tape -> filler -> Elegant Render

1. Rockfon® Mono® Acoustic panel
2. Chicago Metallic™ Monolithic main runner T35
3. Chicago Metallic™ Monolithic cross furring channel
4. Nonius Hanger
5. Standard screw
6. Fastening washer
7. Intersection Bracket
8. Rockfon® Mono® Acoustic Tape
9. Rockfon® Mono® Acoustic Filler
10. Rockfon® Mono® Acoustic Elegant Render
11. Mono Acoustic inspection hatch ø700mm

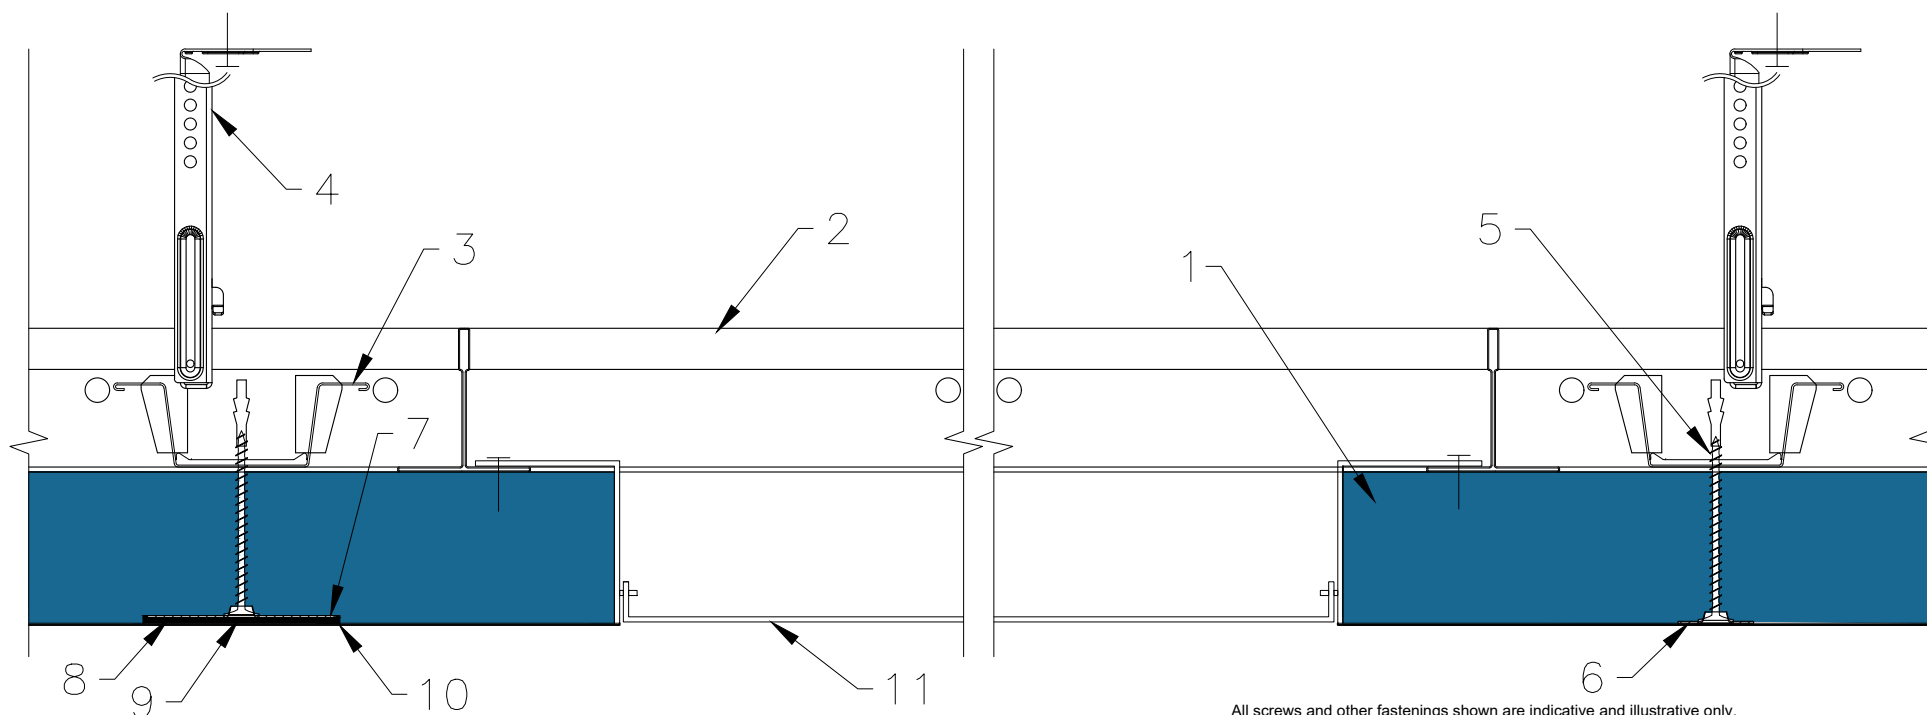

All screws and other fastenings shown are indicative and illustrative only.  
Specific fasteners should be chosen dependent on substrates and materials being used.

### Information:

Rockfon Mono FE  
Armature Integration Detail  
Round inspection hatch Ø700mm integration

### Date:

06-07-2023

### Drawing No.:

SCA-02-T35-FE-40

### Contact information:

info@rockfon.dk

### Drawing Type:

TECHNICAL

### Drawn by:

OPTS

### Scale:

1:2

### Revision No.:

1



We kindly draw your attention to the fact that the above drawings should be considered as guidelines and therefore are without responsibility on the part of Rockfon.