


Square access hatch

Access hatches are available in standard 400x400 mm and 600x600 mm modular sizes. Other dimensions are available to accommodate air-conditioning equipment. Contact Rockfon for detail. The square access hatch should be installed from underneath the grid system!

Joint filling: filler -> tape -> filler -> Elegant Render

1. Rockfon® Mono® Acoustic panel
2. Chicago Metallic™ Monolithic main runner T35
3. Chicago Metallic™ Monolithic cross furring channel
4. Nonius Hanger
5. Standard screw
6. Fastening washer
7. Intersection Bracket
8. Rockfon® Mono® Acoustic Tape
9. Rockfon® Mono® Acoustic Filler
10. Rockfon® Mono® Acoustic Elegant Render
11. Mono Acoustic inspection hatch 600x600mm
12. Acrylic Joint Sealant

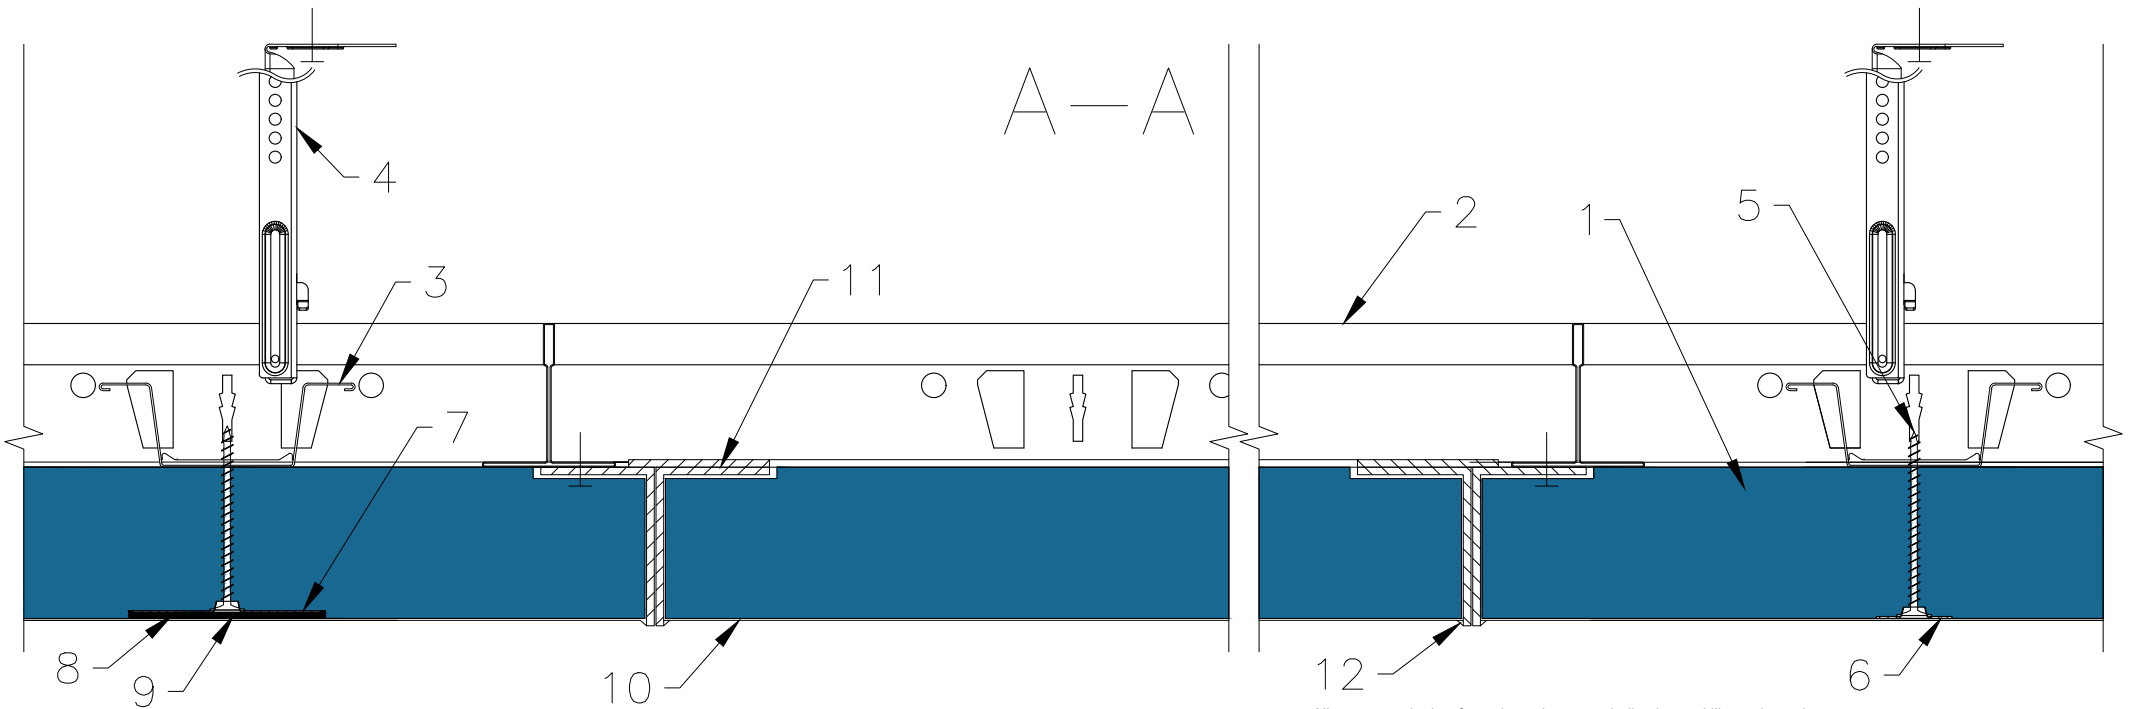

All screws and other fastenings shown are indicative and illustrative only.
Specific fasteners should be chosen dependent on substrates and materials being used.

Information:

Rockfon Mono FE
Armature Integration Detail
Square inspection hatch 600x600mm integration

Date:

06-07-2023

Drawing No.:

SCA-02-T35-FE-39

Contact information:

info@rockfon.dk

Drawing Type:

TECHNICAL

Drawn by:

OPTS

Scale:

1:2

Revision No.:

1



We kindly draw your attention to the fact that the above drawings should be considered as guidelines and therefore are without responsibility on the part of Rockfon.