

DATASHEET

Rockfon MediCare® Plus



Sounds Beautiful

Rockfon MediCare® Plus


- For demanding healthcare applications requiring cleaning with damp cloth using standard detergents and specialist dry steam cleaning (compliant with HBN 00-10 and NSHC)
- Does not contribute to the growth of MRSA, low particle emission (ISO Class 3)
- Fulfils sound absorption criteria for healthcare environments (compliant with HTM 08-01) and highest Reaction to fire (Class A1)
- Full range of formats in concealed, semi-concealed and visible grid options

Product Description

- Stone wool tile
- Visible side: micro-textured white painted, water repellent fleece
- Rear side: back fleece
- Sealed edges

Application Areas

- Healthcare

Edge detail	Module size (mm)	Weight (kg/m ²)	MS / MS easy access (mm)	Recommended installation System	Recycled content	Cradle to Cradle Certified®	A1-A3 Production stage impact (kg CO ₂ eq/m ²)*	A1-C4 Full life cycle impact (kg CO ₂ eq/m ²)*
A24 	1200 x 600 x 20	2.3	50 / 100	Rockfon® System T24 A	37%		2.24	2.8
	600 x 600 x 20		50 / 100	Rockfon® System T24 A				
	1200 x 600 x 20		50 / 100	Rockfon® System T24 A				
	600 x 600 x 20		50 / 100	Rockfon® System XL T24 A				
	1200 x 600 x 20		50 / 100	Rockfon® System T24 A, E ECR				
	600 x 600 x 20		50 / 100	Rockfon® System MediCare T24 A, E (ECR)				
	1200 x 600 x 20		50 / 100	Rockfon® System MediCare T24 A, E (ECR)				
	600 x 600 x 20		50 / 100	Rockfon® System T24 A, E ECR				
	1800 x 600 x 20		50 / 100	Rockfon® System T24 A				
	2100 x 600 x 25	2.7	50 / 100	Rockfon® System MediCare T24 A, E (ECR)				
	2400 x 600 x 25		50 / 100	Rockfon® System T24 A, E ECR				
	2100 x 600 x 25		50 / 100	Rockfon® System MediCare T24 A, E (ECR)				
	2400 x 600 x 25		50 / 100	Rockfon® System T24 A, E ECR				
	600 x 600 x 20		60 / 100	Rockfon® System T24 E	37%		2.97	3.77
	600 x 600 x 20		60 / 100	Rockfon® System T24 A, E ECR				
E24 	600 x 600 x 22	3.7	31 / 31	Rockfon® System T24 X	37%		3.19	4.05
	600 x 600 x 22		31 / 31	Rockfon® System T24 X DLC				

MS = Minimum Suspension


* For full environmental impact disclosure, see our product EPDs available on rockfon.link/uk-epd. Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.



Performance



Sound absorption
 α_w : up to 1.00 (Class A)

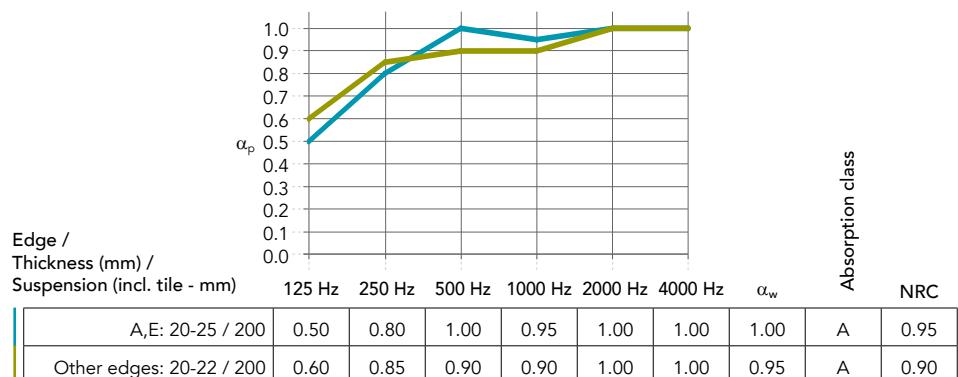

Reaction to fire
A1



Fire protection

The fire resistant properties of stone wool ensure Rockfon ceiling tiles provide fire protection in construction. The fire protection properties of Rockfon ceilings have been tested and classified in accordance with European norm EN 13501-2 and/or national norms depending on requirements in national building codes. Some sizes and edge details of Rockfon MediCare Plus can be used with various Chicago Metallic grids and Rockfon systems to create a 30 and/or 60 minutes fire protecting ceiling in accordance with BS 476 Part 21 and Part 23. They can also be used to create a 30 minutes fire protecting membrane ceiling (integrity only) in accordance with BS 476 Part 22.



Light reflection
85%



Humidity and sag resistance

Up to 100% RH.
No visible deflection in high humidity
C/ON



Cleaning

- Vacuum
- Damp cloth
- Steam cleaning (twice a year)
- Chemical resistance: resistant to diluted solutions of ammonia, chlorine, quaternary ammonium and hydrogen peroxide.



Surface durability

Enhanced durability and dirt resistance.



Clean Room
ISO Class 3



Hygiene

Stone wool provides no sustenance to microorganisms

Microbiological class M1 fulfilling the requirements of Zone 4 (very high risk) defined by NF S 90-351:2013.
Tested with:

- Methicillin Resistant Staphylococcus Aureus (MRSA)
- Candida Albicans
- Aspergillus Brasiliensis

The bactericidal and fungicidal effect of dry steam cleaning meets the requirements of NF EN 14561 ($> 5 \log 10$) and NF EN 14562 ($> 4 \log 10$), meaning the disinfection is very effective.



Recyclability
Fully recyclable stone wool



Indoor environment

Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



Material Health

All materials used in Rockfon products are screened against the list of substances restricted under REACH and do not contain substances of very high concern (SVHC). Rockfon stone wool fibres comply with the safe fibre EU regulation and hold an EUCEB certification.

Sounds Beautiful

