

DATASHEET

# Rockfon Sonar® dB 35



**Sounds Beautiful**

# Rockfon Sonar® dB 35







- Combines room-to-room sound insulation as well as good sound absorption for a flexible office layout where confidentiality is not an issue
- Made from a 25mm stone wool core with a high performance membrane on the back which reduces the transmission of noise from room-to-room
- Basic range of dimensions in semi-concealed and visible grid options
- Light weight sound insulating tile, easy to install/cut and clean with a vacuum or damp cloth

## Product Description

- Stone wool tile
- Visible side: micro-textured white painted fleece
- Rear side: high-performance membrane
- Durable painted edges

## Application Areas

- Office
- Healthcare
- Education

Edge detail	Module size (mm)	Weight (kg/m <sup>2</sup> )	MS / MS easy access (mm)	Recommended installation System	Recycled content	Cradle to Cradle Certified®	A1-A3 Production stage impact (kg CO <sub>2</sub> eq/m <sup>2</sup> )*	A1-C4 Full life cycle impact (kg CO <sub>2</sub> eq/m <sup>2</sup> )*
 A24	600 x 600 x 25	3.4	50 / 100	Rockfon® System T24 A™	35%		3.75	4.73
	1200 x 600 x 25		50 / 100	Rockfon® System T24 A™				
 E15	600 x 600 x 25	3.4	60 / 100	Rockfon® System T15 E™	35%		3.75	4.73
	1200 x 600 x 25		60 / 100	Rockfon® System T15 E™				
 E24	600 x 600 x 25	3.4	60 / 100	Rockfon® System T24 E™	35%		3.75	4.73
	1200 x 600 x 25		60 / 100	Rockfon® System T24 E™				

MS = Minimum Suspension

\* For full environmental impact disclosure, see our product EPDs available on [rockfon.link/uk-epd](https://rockfon.link/uk-epd). Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.



## Performance



**Sound absorption**  
 $\alpha_w$ : 0.80 (Class B)



**Direct sound insulation**  
 $R_w$  = 19 dB



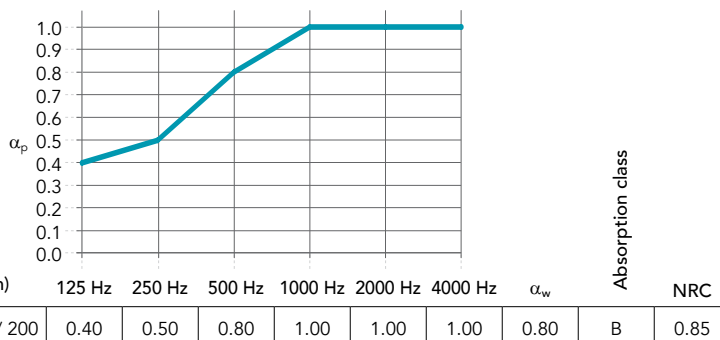
**Room to room sound insulation**  
 $D_{n,f,w}$  = 35 dB

$D_{n,f,w}$  with Rockfon Acoustimass = 45\* dB

$D_{n,f,w}$  with Rockfon Soundstop 30 dB = 50\* dB

The sound insulation properties ( $R_w$ ,  $D_{n,f,w}$ ) presented in the datasheet represent A-edge tiles.

\*) Values obtained on the basis of theoretical analysis.



**Reaction to fire**  
 A1



**Fire resistance**  
 30-60 mins\*  
 \*Subject to edge details, module sizes, grid and hold down clips. Contact our Technical team for more information.



**Light reflection**  
 85%



**Humidity and sag resistance**  
 Up to 100% RH.  
 No visible deflection in high humidity  
 C/0N



**Cleaning**

- Vacuum
- Damp cloth
- Chemical resistance: resistant to diluted solutions of ammonia, chlorine and hydrogen peroxide.



**Hygiene**  
 Stone wool provides no sustenance to microorganisms



**Recyclability**  
 Fully recyclable stone wool



**Indoor environment**  
 Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



**Material Health**  
 All materials used in Rockfon products are screened against the list of substances restricted under REACH and do not contain substances of very high concern (SVHC). Rockfon stone wool fibres comply with the safe fibre EU regulation and hold an EUCEB certification.

06.2024 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.

# Sounds Beautiful

