


Floating Perimeter

The plasterboard profile can be rendered in the same way as the Mono Acoustic panels, or it can be painted.
The use of wood (which is a material that can expand and contract depending on temperature and humidity changes), is advised against by Rockfon.
Rockfon discourages the use of this material in this type of configuration.
Joint filling: filler -> tape -> filler -> Elegant Render

1. Rockfon® Mono® Acoustic panel
2. Chicago Metallic™ Monolithic main runner T35
3. Chicago Metallic™ Monolithic cross furring channel
4. Nonius Hanger
5. Standard screw
6. Fastening washer
7. Intersection Bracket
8. Chicago Metallic™ Monolithic C channel
9. Plasterboard
10. Rockfon® Mono® Acoustic Tape
11. Rockfon® Mono® Acoustic Filler
12. Rockfon® Mono® Acoustic Elegant Render
13. External corner bead

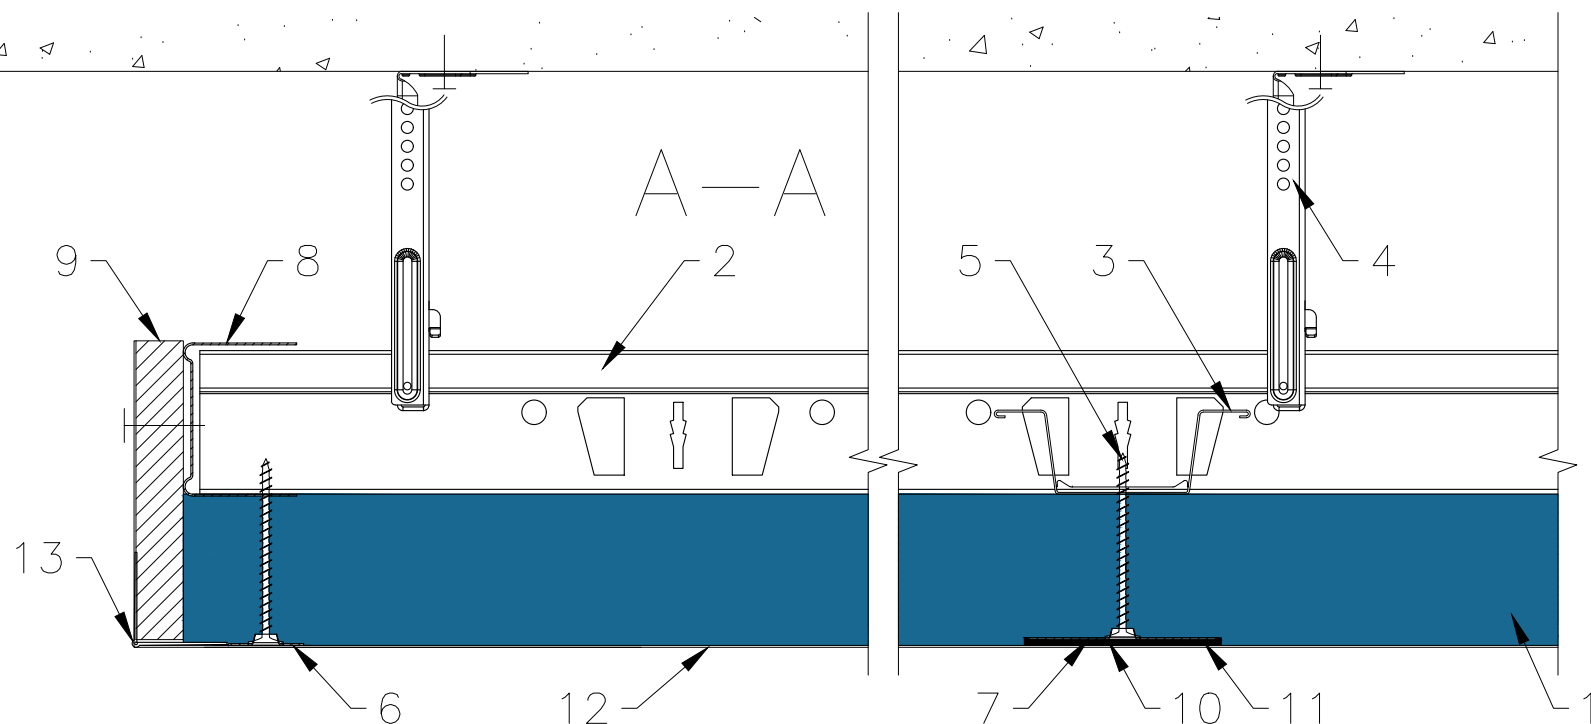

All screws and other fastenings shown are indicative and illustrative only.
Specific fasteners should be chosen dependent on substrates and materials being used.

Information:

Rockfon Mono FE
Island Perimeter Detail
Plasterboard Island solution

Date:

06-07-2023

Drawing No.:

SCA-02-T35-FE-18

Contact information:

info@rockfon.dk

Drawing Type:

TECHNICAL

Drawn by:

OPTS

Scale:

1:2

Revision No.:

1



We kindly draw your attention to the fact that the above drawings should be considered as guidelines and therefore are without responsibility on the part of Rockfon.